


# ELEVAH® 51 MOVE picking

Elevah® 51 MP is the only stock picker made entirely of aluminium and that combines a weight of 330 kg with a safe load capacity of 200 Kg.

Quick and nifty,  
it is ideal for moving  
about in tight spaces  
and in shop aisles



QUICK AND EASY TO USE  
It is extremely easy to handle with quick  
selfpropulsion: 5 km/h at top speed.  
It has a zero turning circle.

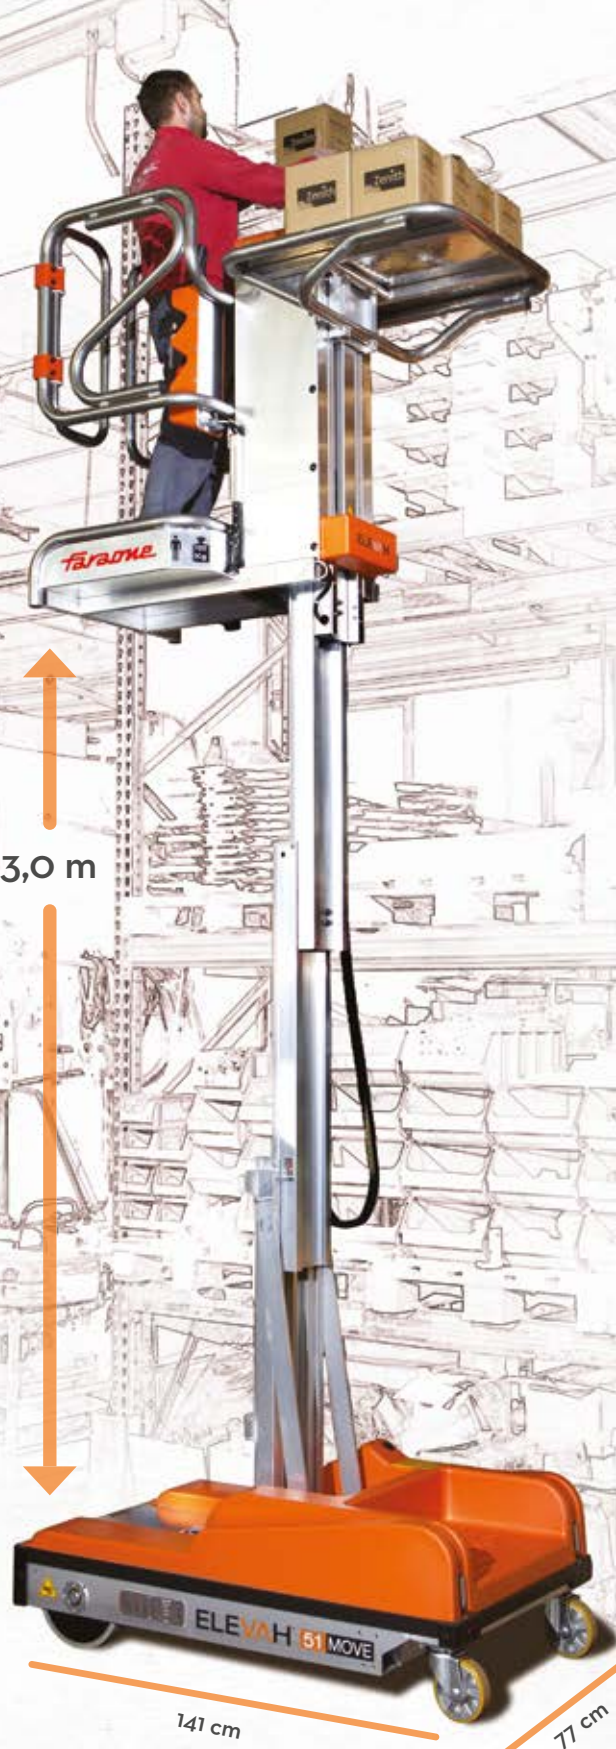





FULLY ALUMINUM



## MAXIMUM PRODUCTIVITY IN A SMALL SPACE.

Thanks to its compact size (77 x 143 cm) and a large and sturdy electric picking platform (with a stroke of 640 mm) the productivity of your company will increase.



COMPLETE CONTROL  
IN ONE HAND THANKS  
TO THE SINGLE LEVER JOYSTICK



ELEVAH 51 MOVE PICKING

STOCK PICKERS



# ELEVAH<sup>®</sup> 51 MOVE picking

## CUSTOMIZABLE PICKING PLATFORM

Several possibilities to customize the picking platform based on customers' needs.

(Details on p. 49)



### EXTENSIBLE



### FOLDING EDGES.



### EXTRALONG FIXED PICKING PLATFORM



### SOME ACCESSORIES AND CUSTOMISATION



**4KIT:** kit with 4 Batteries to double machine's autonomy.






**RL:** side rollers to drive through shelf aisles.

➤ OTHER ACCESSORIES AND CUSTOMISATION ON P. 46

## Technical data

<b>Max. working height</b>		5,10 m
<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		Internal - External
<b>A</b>	Closed machine height	1430 mm
<b>B</b>	Minimum platform height	325 mm
<b>E</b>	Maximum platform height	3000 mm
<b>G/H</b>	Base overall dimensions	780 x 1420 mm
<b>F/G</b>	Cage dimensions	570 x 690 mm
<b>Machine weight</b>		330 kg
<b>Drive wheels dimension</b>		Ø 300 x 76
<b>Swivel wheels dimensions</b>		Ø 150 x 40

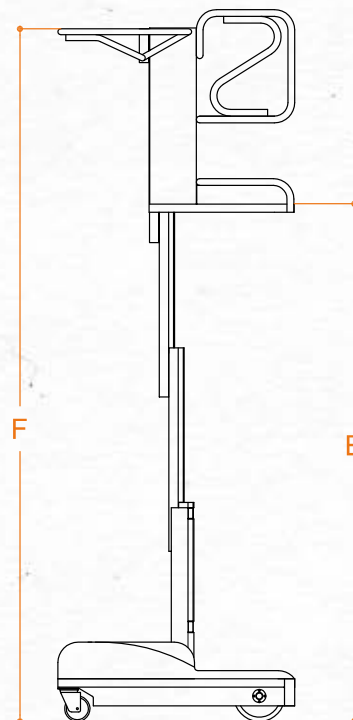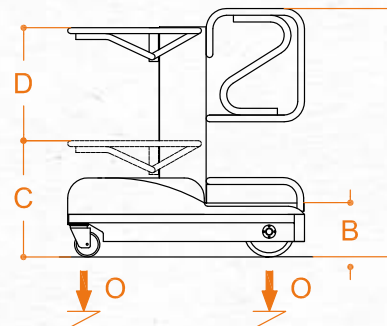

### PICKING PLATFORM

<b>Adjustment</b>		electrical
<b>D</b>	Stroke	640 mm
<b>C</b>	Min. height from the ground	690 mm
<b>F</b>	Max. height from the ground	4010 mm
<b>M/N</b>	Dimensions	780 x 760 mm
<b>Capacity</b>		100 kg

### PERFORMANCE

<b>Power supply</b>		electrical
<b>Batteries</b>		2 AGM 12V 85 Ah
<b>Battery charger</b>		110V - 220V
<b>Maximum climbing ability</b>		5%
<b>Internal turning radius</b>		0
<b>External turning radius</b>		1380 mm
<b>Max. speed (rising - descending)</b>		0,15 m/s
<b>Maximum shifting speed (on the ground - at height)</b>		1,25 - 0,42 m/s
<b>O</b>	Maximum pressure for wheel at full load*	1,90 kN
<b>Work cycles ** (with fresh batteries)</b>		Ca. 100

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

The machine can work at temperatures between -15° C and +40° C

# ELEVAH 51 MOVE PICKING

Max. working height	5,10 m
Max capacity	200 kg
Number of people	1
Use	Internal - External
<b>A</b> Closed machine height	1430 mm
<b>B</b> Minimum platform height	325 mm
<b>E</b> Maximum platform height	3000 mm
<b>G</b> Base overall dimensions	780 mm
<b>H</b>	1420 mm
<b>F</b> Cage dimensions	570 mm
<b>G</b>	690 mm
Machine weight	330 kg
Drive wheels dimension	Ø 300 x 76 mm
Swivel wheels dimensions	Ø 150 x 40 mm

## PICKING PLATFORM

Adjustment	Electrical
<b>D</b> Stroke	640 mm
<b>C</b> Min. height from the ground	690 mm
<b>F</b> Maximum height from the ground	4010 mm
<b>M</b> Dimensions	780 mm
<b>N</b>	760 mm
Capacity	100 kg

## PERFORMANCE

Power supply	Electrical
Batteries	2 AGM 12V 85 Ah
Battery charger	110V – 230V 50/60HZ
Climbing ability at height	5%
Internal turning radius	0
External turning radius	1380 mm
Max. speed (rising – descending)	0,15 m/s
Maximum speed (with basket on the ground)	4,5 km/h
<b>O</b> Maximum pressure for wheel at full load*	1,90 kN
Work cycles (with fresh batteries) **	Ca. 100

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



TÜV certified.

Complies with European regulations for man-up forklift trucks. UNI EN ISO 3691-1.

