


ELEVATOR[®] 5 MOVE LIGHT

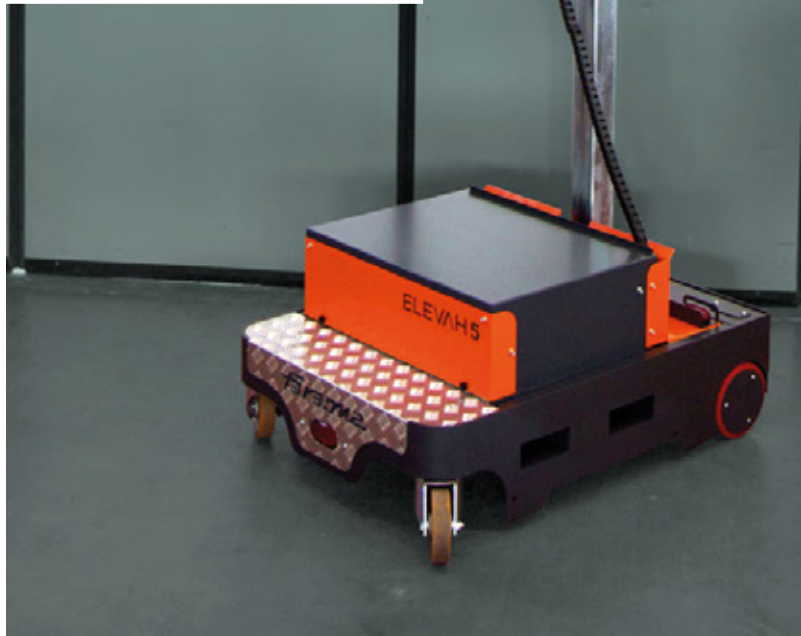

ELEVATOR[®] 5 MOVE LIGHT

Max. working height		4,9 m
Max capacity		200 kg
Number of people		1
Use		Internal
A	Closed machine height	1690 mm
B	Min. height from the ground*	290 mm
C	Maximum platform height	2910 mm
D	Base overall dimensions	1110 mm
E		780 mm
F	Cage dimensions	685 mm
G		600 mm
Machine weight		400 kg
Power supply		24 V
Batteries		2 Trojan Lead-Acid 12V 105 Ah
Battery charger		110V – 220V 50/60HZ
Climbing ability at height		1,7% -1°
H	Maximum climbing ability	15%
Drive wheels dimension		Ø 186 x 60 mm
Swivel wheels dimensions		Ø 150 x 40 mm
Internal turning radius		0
Max. speed (rising – descending)		0,2 m/s
Maximum shifting speed		5,5 Km/h
Maximum shifting speed at height		1 Km/h
I	Maximum pressure for wheel at full load**	2,1 kN
Work cycles (with fresh batteries) ***		100

* There is an intermediate step.

** Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

*** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Compliant with **EN280** rule.
Approved for indoor use or outdoor use in the absence of wind.

