


ELEVAH[®] 50 MOVE



The lightest and most compact platform, designed to allow you to work in safety even in the most restricted and difficult to reach areas. It is ideal for plant engineering companies, industrial maintenance and construction.

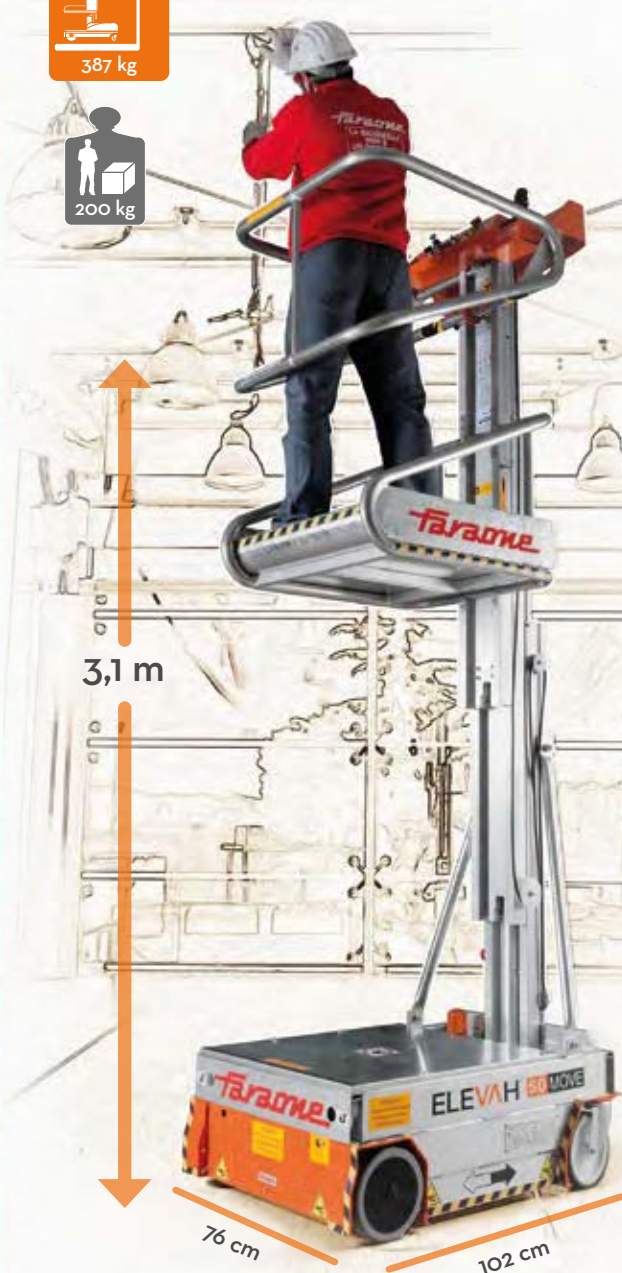

SOME ACCESSORIES AND CUSTOMISATION



ZA: ballast for slippery floors (100 kg)



CA: Portable control with 150cm cable.

➤ **OTHER ACCESSORIES AND CUSTOMISATION ON P. 46**






EASY TO CARRY

Thanks to its low weight and its size, Elevah 50 Move can be easily transported by any means, even by lift!

TECHNICAL DATA

Max. working height		5,10 m
Max capacity		200 kg
Number of people		1
Use		internal
A	Closed machine height	1690 mm
B	Minimum platform height	430 mm
C	Maximum platform height	3100 mm
D/E	Base overall dimensions	1020 x 760 mm
F/G	Cage dimensions	700 x 760 mm
H/I	Storage tray dimensions	230 x 620 mm
Capacity of storage tray		20 kg
Machine weight		387 kg
Drive wheels dimension		Ø 220 x 65
Swivel wheels dimensions		Ø 200 x 45

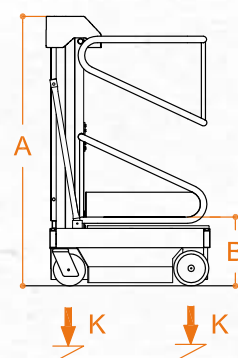

PERFORMANCE

Power supply		electrical
Batteries		2 Lead-Acid Batteries 12V 105 Ah
Battery charger		110V - 220V
Climbing ability at height		2,5%
J	Maximum climbing ability	13%
Internal turning radius		0
External turning radius		1130 mm
Max. speed (rising – descending)		0,12 - 0,15 m/s
Maximum shifting speed (on the ground - at height)		0,93 - 0,22 m/s
K	Maximum pressure for wheel at full load*	2,07 kN*
Work cycles ** (with fresh batteries)		Ca. 140

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

ELEVAH 50 MOVE

TECHNICAL DATA

ELEVAH 50 MOVE

Max. working height	5,10 m
Max capacity	200 kg
Number of people	1
Use	Internal
A Closed machine height	1690 mm
B Minimum platform height	430 mm
C Maximum platform height	3100 mm
D Base overall dimensions	1020 mm
E	760 mm
F Cage dimensions	700 mm
G	760 mm
H Fixed picking tray dimensions	230 mm
I	620 mm
Fixed picking tray capacity	20 kg
Machine weight	387 kg
Drive wheels dimension	Ø 220 x 65 mm
Swivel wheels dimensions	Ø 200 x 45 mm

PERFORMANCE

Power supply	24 V
Batteries	Lead-Acid Batteries 12V 105 Ah
Battery charger	110V – 230V 50/60HZ
J Maximum climbing ability	13 %
Climbing ability at height	2,5 %
Internal turning radius	0
External turning radius	1130 mm
Max. speed (rising – descending)	0,12 - 0,15 m/s
Maximum shifting speed (on the ground - at height)	0,93 - 0,22 m/s
K Maximum pressure for wheel at full load*	2,07 kN
Work cycles (with fresh batteries)**	Ca. 140

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Compliant with **EN280** rule.
Approved for indoor use or outdoor use in the absence of wind.

